

# Plastic clamp

## Applications

Fixing the cables in:


- Electrical installation
- Industrial wiring
- Electrical cabinets
- Wiring automotive and naval sector
- Special applications

## Advantages

- Speed of installation
- Inclined end to facilitate the introduction of collars into the head
- Rounded corners that guarantee more safety
- Ease of sliding

## Features

- Self-extinguishing according to UL 94-V2 standard.
- Black cable ties are filled with black carbon, so they are UV resistant as tested by QUV-B ISO 4892

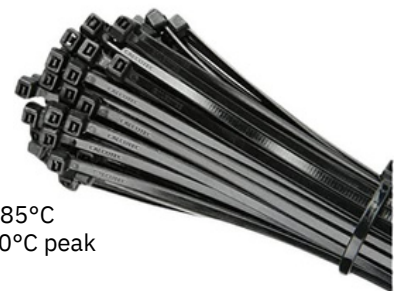

- Polyamide 6.6 cable tie
- self-extinguishing according to UL 94-V2
- UV resistant (only black)
- Colors: black and natural

- Operating temperature from - 40°C to + 85°C
- Maximum admissible temperature: + 110°C peak
- Melting temperature: +256°C
- Halogen free

Size	Width mm	Length mm	Ø max of tightening mm	Résistance Kg	natural	black
2,5 x 100	2,5	100	24	11	Yes	Yes
3,5 x 140	3,5	140	36	20	Yes	Yes
3,5 x 200	3,5	200	55	20	Yes	Yes
3,5 x 280	3,5	280	80	20	Yes	Yes
4,5 x 200	4,5	200	51	28	Yes	Yes
4,5 x 280	4,5	280	76	28	Yes	Yes
4,5 x 360	4,5	360	101	28	Yes	Yes
4,5 x 430	4,5	430	123	28	No	Yes
7,5 x 360	7,5	360	101	65	No	Yes
7,5 x 540	7,5	540	160	65	No	Yes

## Resistance to external agents:

- Excellent resistance to aromatic solvents, bases, oils, greases, petroleum products
- Limited resistance to acids
- Not resistant to phenol and chlorinated solvents
- Resistance to UV rays (black color)



## EC Directives :

The material used to produce our collars complies with the directives following :

- 2000/53/EC (ELV)
- 2002/95/EC (RoHS)
- 2002/96/EC (WEEE)
- 2003/ 1 1/ EC

